

FORM PTO-1390 (Modified)
(REV 11-98)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371**

8292.024

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

09/807214INTERNATIONAL APPLICATION NO.
PCT/JP00/05396INTERNATIONAL FILING DATE
11 August 2000PRIORITY DATE CLAIMED
12 August 1999

TITLE OF INVENTION

ELECTRODE STRUCTURE, ELECTRIC COMPONENTS AND MANUFACTURING METHOD

APPLICANT(S) FOR DO/EO/US

SATO, Takaya; SHIMIZU, Tatsuo

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ A copy of the International Search Report (PCT/ISA/210).
8. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
9. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
10. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
11. ☐ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☐ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ Certificate of Mailing by Express Mail
20. ☐ Other items or information:

Spec, Claims, & Abstract

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

09/807214

PCT/JP00/05396

8292.024

21. The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a)-(1) - (5)) :

- ☐ Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO \$970.00
- ☒ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$840.00
- ☐ International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$690.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$670.00
- ☐ International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$96.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

\$840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than months from the earliest claimed priority date (37 CFR 1.492 (e)).

☐ 20 ☐ 30

\$0.00

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	
Total claims	13 - 20 =	0	x \$18.00	\$0.00
Independent claims	5 - 3 =	2	x \$78.00	\$156.00
Multiple Dependent Claims (check if applicable).				<input type="checkbox"/> \$0.00

TOTAL OF ABOVE CALCULATIONS =

\$996.00

Reduction of 1/2 for filing by small entity, if applicable. Verified Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28) (check if applicable).

☐

\$0.00

SUBTOTAL =

\$996.00

Processing fee of \$130.00 for furnishing the English translation later than months from the earliest claimed priority date (37 CFR 1.492 (f)).

☐ 20 ☐ 30

\$0.00

TOTAL NATIONAL FEE =

\$996.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) (check if applicable).

☐

\$0.00

TOTAL FEES ENCLOSED =

\$996.00

Amount to be

refunded

\$

charged

\$

☒ A check in the amount of \$996.00 to cover the above fees is enclosed.

☐ Please charge my Deposit Account No. in the amount of to cover the above fees.
A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge any fees which may be required, or credit any overpayment to Deposit Account No. 50-0548 A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Liniak, Berenato, Longacre & White
6550 Rock Spring Drive
Suite 240
Bethesda, MD 20817
(301)896-0600

SIGNATURE

Matthew F. Johnston

NAME

41,096

REGISTRATION NUMBER

April 11, 2001

DATE

Specification

Electrode structure, electrical components and manufacturing method

Field of the Invention

This invention relates to an electrode structure using an ion-conducting polymer, and to an electrical component such as a primary cell, a secondary cell, and an electric double layer capacitor.

Background of the Invention

In the prior art, in a lithium ion battery, a positive electrode h is manufactured by mixing a mixture e of a powdered electrode active substance a comprising LiCoO_2 , powdered electrically-conducting carbon b, a binder polymer c and a solvent d into a slurry, and applying it to a current-collecting member f to form a compound film g, as shown in Fig. 13. The compound film g of Fig. 13 is a partial enlargement of the mixture e on the current-collecting member f.

A negative electrode i is manufactured by mixing the mixture e of the powdered electrode active substance a comprising powdered graphite, the binder polymer c and the solvent d into a slurry, applying it to the current-collecting member f, and drying to form the compound film g, as shown in Fig. 14.

A lithium secondary cell contains an electrolyte j between the positive electrode h and negative electrode i, a separator k being disposed in the electrolyte j, as shown in Fig. 15.

The lithium secondary cell is generally formed by applying a dispersion of the electrode active substance a or the binder c in an organic solvent to a current-collecting member f comprising metal foil or the like, drying, winding a sheet electrode comprising the compound film g into a spiral shape together with the separator k, inserting this spiral-shaped electrode into a battery case, filling with the organic solvent electrolyte j, and sealing. This battery is characterized by having a high energy density per unit capacity and high energy density per unit weight.

However, concerning the electrode active substance a contained in the compound film g, doping/undoping of lithium ions is performed during charging and discharging through the electrolyte j which permeated the voids in the compound film j, and if the particles of the electrode active substance a are covered by the binder polymer c, lithium ions are prevented from penetrating the electrode active substance a, so battery performance declines.

Specifically, this is because the binder polymer c which is generally used does not have ion-conducting properties. The binder polymer c may be vinylidene polyfluoride, a fluoride resin such as polytetrafluoroethylene-hexafluoropropylene copolymer, styrene-butadiene rubber latex or carboxyl-modified styrene-butadiene rubber latex.

Even if there are minute interstices on the surfaces of the electrode active substance particles a covered by the binder polymer c, the electrolyte j cannot penetrate them, so passage of lithium ions is blocked and the battery characteristics decline.

If the amount of the added binder polymer c is reduced in an attempt to increase the interstices on the particle surfaces of the electrode active substance a, the strength of the compound film g decreases, so cohesion between the electrode active substance a or electron-conducting assistant and the current-collecting member f gradually declines during repeated charges and discharges of the battery, and battery performance declines due to decrease of electron-conducting properties.

As a means of resolving this problem, Japanese Patent Laid-Open Hei 10-106540 discloses a method of forming the binder polymer c as a mesh. However, even if the electrode active substance a is made to adhere in a mesh-like fashion by the binder polymer c, the binder polymer c which is used is a non-ion conducting polymer, so ions cannot penetrate or move through the binder polymer c. Therefore, in this case also, penetration of lithium ions into the electrode active substance a is blocked as in the case of a prior art electrode. As a result, the battery performance declines.

In USP 5,641,590 (Japanese Patent Laid-Open Hei 9-50824), the inventors disclose a method for manufacturing electrodes wherein an ion-conducting polymer is added to the electrode instead of the prior art binder polymer c which does not have ion-conducting properties. However, in this case, the ion-conducting polymer itself has a weak adhesive force, and as it is merely added to the electrode active substance a when the compound film g is manufactured, it does not permit manufacture of a battery having satisfactory performance.

Batteries are used for various types of electrical components, and they have to satisfy stringent safety criteria with regard to fire, etc. In the case of a lithium-ion battery, oxygen is generated if the LiCoO_2 is heated to high temperature and as there is a risk of explosion or fire if a large current flows due to a short-circuit, safety is a prime consideration.

Disclosure of the Invention

It is an object of this invention to provide a highly efficient electrode.

It is a further object of this invention to provide an electrode with a high level of safety.

It is a further object of this invention to provide a secondary cell with a high level of safety.

It is a further object of this invention to provide an extremely safe electric double layer capacitor.

It is a further object of this invention to provide a secondary cell which does not use an electrolyte.

It is a further object of this invention to provide an electric double layer capacitor which does not require the use of electrolyte.

This invention specifically relates to:

an electrode structure for electrical components wherein ions migrate between electrodes, wherein a powdered electrode active substance coated with an ion-conducting polymer or a powdered large surface material is made to adhere to a current-collecting member,

a secondary cell comprising a positive electrode structure and negative electrode structure comprising a current-collecting member to which a powdered electrode active substance coated with an ion-conducting polymer is made to adhere, and an ion-conducting substance disposed between the positive electrode structure and negative electrode structure,

a method of manufacturing an electrode structure for electrical components wherein ions migrate between electrodes, wherein the electrode structure is formed by press-sliding a mixture of at least an ion-conducting polymer or ion-conducting polymer raw material with a powdered electrode active substance or a powdered large surface material so as to coat the powdered electrode active substance or a powdered large surface material with the ion-conducting polymer, and applying the product to a current-collecting member,

a method of manufacturing a secondary cell wherein ions migrate between electrodes, wherein an ion-conducting substance is disposed between a positive electrode structure and a negative electrode structure formed by press-sliding at least an ion-conducting polymer and a powdered electrode active substance so as to coat the powdered electrode active substance with the ion-conducting polymer, and applying the product to a current-collecting member, and

an electric double layer capacitor having an electrode structure comprising a current-collecting member to which a powdered large surface material coated with an ion-conducting polymer is made to adhere and an ion-conducting substance disposed between the electrode structure.

Brief Description of the Drawings

Fig. 1 is a diagram showing the manufacture of an electrode structure comprising an electrode active substance which supplies ions.

Fig. 2 is a diagram of an electrode structure comprising an electrically conducting substance wherein electricity moves between ions.

Fig. 3 is a schematic view of a secondary cell.

Fig. 4 is a descriptive diagram of a pressure-sliding mixer.

Fig. 5 is a schematic view of the press-sliding mixer wherein the bottom surface of a container is flat.

Fig. 6 is another schematic view of the press-sliding mixer.

Fig. 7 is a front view of the press-sliding mixer.

Fig. 8 is a lateral view of the press-sliding mixer.

Fig. 9 is a descriptive diagram of a cohesion device.

Fig. 10 is an electron micrograph of LiCoO_2 which has not received any processing.

Fig. 11 is an electron micrograph of a positive electrode structure obtained in a third embodiment.

Fig. 12 is a photograph of a secondary electronic image of the positive electrode structure obtained in the third embodiment.

Fig. 13 is a diagram showing the manufacture of a positive electrode structure of a secondary cell according to the prior art.

Fig. 14 is a diagram showing the manufacture of a negative electrode structure of a secondary cell according to the prior art.

Fig. 15 is a schematic view of a secondary cell according to the prior art.

This invention will now be described in more detail referring to the drawings.

(a) Electrical components

Electrical components wherein ions migrate between electrodes are those in which an ion-conducting substance is disposed between electrode structures functioning as electrodes, and ions migrate within the ion-conducting substance so that a current flows between the electrodes, e.g., primary cells, secondary cells, and an electric double layer capacitor..

Batteries are characterized in that an ion-conducting substance is disposed between the positive electrode structure and negative electrode structure and that an ion, including a proton or a positive hydrogen ion, migrates between electrodes and is accumulated. An electric double layer capacitor is characterized in that an ion-conducting substance is disposed between a pair of electrode structures and an electric double layer is formed between a large surface material within the electrode structures and an electrolyte of the ion-conducting substance.

(b) Electrode structures

Electrode structures are used as electrodes in these electrical components, and exchange electrical charges with ions or draw ions. For this purpose, they have a construction in which a powdered electrode substance

coated with an ion-conducting polymer, is made to adhere to a current-collecting member. For instance, they have a construction in which the powdered electrode active substance used for batteries or a powdered large surface material with a large surface area used for an electric double layer capacitor is made to adhere to a current-collecting member.

Fig. 1 shows a process for manufacturing an electrode structure 1 wherein a powdered electrode substance, i.e., a powdered electrode active substance 11, comprising particles of a compound such as LiCoO_2 is coated with an ion-conducting polymer 12, and is made to adhere to a current-collecting member 13. Likewise, Fig. 2 shows a process for manufacturing the electrode structure 1 wherein a powdered electrode substance, i.e., the powdered electrode active substance 11 having a form such as that of graphite or hard carbon is coated with the ion-conducting polymer 12, and is made to adhere to the current-collecting member 13. A powdered large surface material such as an activated carbon as the powdered electrode substance may be coated with the ion-conducting polymer and is adhered to the current-collecting member to form an electrode structure of the electric double layer capacitor.

Fig. 1 shows the case where the electrical conductivity of the powdered electrode active substance 11 is low. The electrical conductivity in the powdered electrode active substance and between the powdered electrode active substance 11 and current-collecting member 13, is increased and the current-collecting efficiency improved by mixing with a powdered electrically-conducting substance 14. The powdered electrically-conducting

substance 14 may or may not be coated with the ion-conducting polymer.

"Coating" refers to a state of contact wherein ions can easily migrate between the ion-conducting polymer 12 and the powdered electrode substance, i.e., the powdered electrode active substance 11 over their entire surfaces or the powdered large surface material over their entire surfaces. The ion-conducting polymer 12 is coated on the surface of the powdered electrode active substance 11 or the powdered large surface material so that the latter is covered by the ion-conducting polymer 12. The powdered electrode active substance 11 becomes more active the finer the particles of which it is comprised, but its activity can be suppressed to give greater stability by coating with the ion-conducting polymer 12.

If the layer of the coated ion-conducting polymer 12 is thick, conductivity decreases and current-collecting efficiency is poorer, so it is preferably thin.

The term "powdered" as used in the powdered electrode active substance 11, the powdered electrically-conducting substance 14, or the powdered large surface material refers to a substance having a fine particle state. In some cases, it may refer to a state wherein a large number of substances having a fine particle state are agglomerated.

(c) Powdered electrode active substance

The powdered electrode active substance may be a material which permits insertion and separation of ions, or a π -conjugated electrically-conducting polymer material.

There is no particular limitation on the electrode active material used as the positive electrode in a non-aqueous electrolytic battery, but in the case of a rechargeable secondary cell, a chalcogen compound permitting insertion and separation of lithium ions or a complex chalcogen compound containing lithium may for example be used.

Examples of chalcogen compounds are FeS_2 , TiS_2 , MoS_2 , V_2O_5 , V_6O_{13} and MnO_2 . Examples of chalcogen compounds containing lithium are LiCoO_2 , lithium complexes represented by $\text{Li}_x\text{Ni}_y\text{M}_{1-y}\text{O}_2$ (where M is at least one metal element chosen from transition metals or Al, but preferably at least one metal element chosen from Co, Mn, Ti, Cr, V and Al, and $0.05 \leq x \leq 1.10$, $0.5 \leq y \leq 1.0$), LiNiO_2 , LiMnO_2 and LiMn_2O_4 . These compounds may be obtained from the oxides, salts or hydroxides of lithium, cobalt, nickel or manganese as starting materials, mixing the starting materials depending on the composition, and firing in an oxygen atmosphere at a temperature in the range of 600 °C-1000 °C.

There is no particular limitation on the electrode active substance used as the negative electrode in a non-aqueous electrolyte battery, but a material permitting insertion and separation of lithium ions may be used such as lithium metal, lithium alloy (alloys of lithium and aluminum, lead and indium, etc.), and carbon materials.

Examples of π -conjugated conducting polymer materials are polyacetylenes, polyanilines, polypyrroles, polythiophenes, poly-(para)-phenylenes, polycarbazoles, polyacenes and sulfur polymers.

In particular, in non-aqueous electrolyte primary cells, a large battery capacity can be obtained by using lithium metal for the negative electrode.

In non-aqueous electrolyte secondary cells, an excellent cycle life can be obtained by using carbon materials which permit insertion and separation of lithium as the negative electrode. There is no particular limitation on the carbon material, examples being pyrolytic carbon, cokes (pitch coke, needle coke or petroleum coke), graphites, glass carbons, organic polymer compound firing products (products obtained by firing and carbonizing phenolic resins and furan resins at a suitable temperature), carbon fiber and active carbon.

(d) Powdered electrode substance with a large surface area

A powdered electrode substance with a large surface area is a powdered large surface material that may draw many ions on that surface. A preferable powdered large surface material has its specific surface area of $500\text{m}^2/\text{g}$ or larger, more preferably $1000\text{m}^2/\text{g}$ or larger, further more preferably $1500\text{m}^2/\text{g}$ - $3000\text{m}^2/\text{g}$, and its average particle diameter of $30\mu\text{m}$ or lower, more preferably $5\text{-}30\mu\text{m}$ carbon material. If the specific surface area and the average particle diameter are out of the above-specified range, and it may be difficult to secure a high electrostatic capacity and a low resistance electric double layer capacitor.

A preferable powdered large surface material especially is an activated carbon resulting from activating the carbon material such as by a steam activating treatment and a fused KOH activating treatment. The activated carbon for example may be palm shell activated carbon, a phenol activated carbon, a petroleum coke type activated carbon, and polyacenes. One of the above activated carbon types or combination of two or more activated carbon

types may be employed. Phenol activated carbon, a petroleum coke type activated carbon, and a polyacenes are preferable since they provide a larger electrostatic capacity.

(e) Powdered electrically-conducting substance

The powdered electrically-conducting substance increases the electrical conductivity of the electrode structure, there being no particular limitation thereon, but metal powders and carbon powder may be used. As carbon powder, pyrolytic carbon such as carbon black and its graphitization products, artificial and natural scaly graphite powder, and carbon fiber and its graphitization products, are suitable. Mixtures of these carbon powders may also be used.

(f) Ion-conducting polymer

The ion-conducting polymer is a polymer which can dissolve at least the lithium salts described hereafter at a concentration of at least 0.1M (moles/l), the polymer containing the lithium salt at a concentration of at least 0.1M having an electrical conductivity of 10^{-8} S (siemens)/cm at room temperature. It is to be particularly preferred that the ion-conducting polymer dissolves at least lithium salts to a concentration of 0.8M-1.5M, the resulting polymer solution having an electrical conductivity of 10^{-3} S/cm - 10^{-5} S/cm at room temperature.

The lithium salt is at least one type of lithium salt having ClO_4^- , CF_3SO_3^- , BF_4^- , PF_6^- , AsF_6^- , SbF_6^- , CF_3CO_2^- or $(\text{CF}_3\text{SO}_2)_2\text{N}^-$ as anion.

The ion-conducting polymer raw material is a substance which produces the ion-conducting polymer by cross-linking, etc., when energy is supplied externally. The energy may be heat, ultraviolet light, light or electron radiation.

(g) Current-collecting member

The current-collecting member should be a substance which easily passes electricity. Its shape and material are selected according to the electrical components involved, and as an example, it can be formed by fashioning an electrically-conducting substance such as aluminum or copper into a plate, foil or mesh.

In the case of a plate or foil current-collecting member, one surface or both surfaces are used according to the structure of the electrical components, and the powdered electrode active substance is made to adhere to one surface or both surfaces.

(h) Secondary cell

The secondary cell comprises the ion-conducting substance disposed between two types of the electrode structures 1. The secondary cell is formed by introducing a liquid such as the electrolyte 14 between an electrode structure 101 of the positive electrode and an electrode structure 102 of the negative electrode, and disposing a separator 15 between them as shown for example in Fig. 3(A). Alternatively, it is formed by disposing a solid electrolyte substance such as an ion-conducting polymer 16 between the electrode structure 101 of

the positive electrode and the electrode structure 102 of the negative electrode as shown in Fig. 3(B).

(i) Electric double layer capacitor

The electric double layer capacitor has a construction in which the powdered large surface material is used to form a pair of electrode structures and an electrolyte substance is disposed between the pair of electrode structures.

The method of manufacturing these electrode structures will now be described.

(a) Manufacture of electrode structure

If the powdered electrode active substance is used as the powdered electrode substance, to manufacture the electrode structure, an extremely thin ion-conducting polymer or ion-conducting polymer raw material is coated on the surface of the powdered electrode active substance 11. Next, a solvent is added to liquefy the mixture into a paste which is applied to the current-collecting member, and dried to evaporate the solvent. Alternatively, the solvent can be added from the beginning to make a paste when the ion-conducting polymer or ion-conducting polymer raw material is coated. If the powdered large surface material is used as the powdered electrode substance, the same process applied with the powdered electrode active substance may be employed to manufacture the electrode structure.

In this process, a minute amount of the ion-conducting polymer or ion-conducting polymer raw material is used, the particle surfaces of the powdered electrode active substance are coated with the ion-conducting polymer, no voids are formed, and gaps in the powdered substance are reduced.

To coat the ion-conducting polymer or ion-conducting polymer raw material on the powdered electrode active substance, the ion-conducting polymer or ion-conducting polymer raw material and the powdered electrode active substance are press-slid together to obtain a press-slid product.

(b) Press-sliding

Press-sliding is the action of sliding while pressing mixtures 10 of the ion-conducting polymer 12 or the raw material of the ion-conducting polymer 12 and the powdered substance 11 together. An external force is applied to the mixtures so that they cohere to each other and the particles rotate, and this process is performed repeatedly to obtain a press-sliding product.

(c) Press-sliding mixer

The press-sliding mixer is shown, for example, in Fig. 4. The mixture 10 of the ion-conducting polymer 12 or its raw material with the powdered substance 11, or the mixture 10 comprising this mixture and a solvent or the like, is introduced into a container 21, and the main blade 22 is rotated. There is a gap between a base 211 of the container 21 and a bottom surface of the main blade 22. When the main blade 22 is rotated, part of the mixture 10 enters the

space between the base 211 of the container and the main blade 22, is subjected to press-sliding, and is kneaded. This process is repeated so that the ion-conducting polymer 12 or its raw material coats the powdered substance 11.

A press-sliding mixer 2 may if necessary be provided with a dispersion blade 23 in the container 21. The dispersion blade 23 is rotated at high speed to disperse the press-slid mixture 10.

(d) Container

The container 21 is provided for holding the mixture 10 which is press-slid and stirred. The bottom surface of the container 21 may be such as to permit press-sliding of the mixture 10, and may be slanting as in Fig. 4 or flat as in Fig. 5. For example, if it is slanting, it has a bottom part 2111, and slants upwards from the bottom part 2111 towards the circumference. The center part may be situated in a low position, and have a slope rising towards the circumference. The bottom 211 may be formed in the shape of, for example, a grinding mortar, and the angle of the bottom part 2111 may for example be 120 degrees. The bottom 211 of the container is wear-resistant, and is formed by thermal spraying with tungsten or carbide using SUS. Plural bottom parts 2111 of this type may also be formed on the bottom surface.

(e) Main blade

The main blade 22 functions together with the bottom surface of the container 21, serving to press-slide and stir the mixture. The main blade may

have a number of different shapes. For example, in Fig. 5 or Fig. 6(B), it is disk-shaped or plate-shaped and in Fig. 6(A), it is fashioned into a wide blade so as to provide a large surface area between the bottom surface of the container and the blade adjacent to it, thereby increasing the efficiency of press-sliding. If the main blade is disk-shaped, for example, it has some through holes 224 as is shown in Fig. 5(B) and notched grooves 225 as is shown in Fig. 6(B). The mixture is transported to a gap between the bottom surface of the main blade 22 and the container via the through holes 224 or the notched grooves 225.

If the mixture adhering to the lateral surfaces of the container is removed, stirring efficiency can be increased. For this purpose, members adjacent to the lateral surfaces of the container, for example scrapers 223, may be attached to the tip of the main blade as shown in Fig. 5 or Fig. 6. The scrapers 223 rotate together with the main blade so that mixture in the vicinity of the lateral surfaces of the container is scraped off, and is transported to the gap between the bottom surface of the container and the blade surface. Hence, press-sliding is performed with high efficiency. At least, the tip of the main blade is to remove the mixture adhered to the lateral surface of the container and may be positioned away from the main blade for the independent operation.

In the main blade 22, a shaft is attached in a position corresponding to the bottom part 2111 of the container 21 as shown for example in Fig. 4(B), and if the bottom surface of the container is slanting, it curves upwards along the bottom of the container from the bottom part 2111. The main blade 22 may comprise two blades attached from the center part as shown in Fig. 4(B), or it

may comprise a larger number of blades, e.g. 10 or more, depending on the amount and type of mixture. Instead of a large number of blades, a wide blade having a wide base may also be used. This allows larger surface for the press-sliding action, thereby providing more efficient press-sliding.

The main blade is rotated by a main motor 222. By permitting the blade to rotate freely in the reverse direction, more complex press-sliding control can be performed. A sympathetic flow may also be set up in the mixture due to the rotation of the main blade, so sympathetic flow is prevented by reversing the main blade during the rotation. For example, forward rotation is performed for 10 seconds, the blade is stopped, and reverse rotation is then performed for 10 seconds. By repeating this action, press-sliding control is performed. Practically identical results for press-sliding were obtained when this back and forth reverse control was performed for approximately 30 minutes, and when rotation in the same direction was performed for approximately 3 hours. There are also many other rotation methods, for example the rotation angle can continuously be suitably varied like a sine curve, etc. The rotation speed of the main blade, i.e., the number of rotations, is set low, for example to 120 rpm or less, when press-sliding is performed.

The gap between the bottom surface of the container 21 and the base surface of the main blade 22 is set as narrow as is necessary for press-sliding the mixture, for example 15 mm or less. This distance depends on the capacity of the press-sliding mixer 2 and on the shape of the main blade, etc.

For the main blade 22 having the particular shape described in Fig. 4, the surface in the motion direction (press-sliding direction) of the main blade 22

is formed so that a pressing angle θ relative to the bottom surface of the container 21 is an acute angle. For example, if the cross-section of the main blade 22 is a reverse trapezoid as shown in Fig. 4(C), the pressing angle is from 3 degrees to 70 degrees. The cross-section of the main blade 22 may also be circular or have a rounded corner as shown in Fig. 4(D). The material of the main blade has wear-resistant properties, and is formed for example by thermal spraying with tungsten or carbide using SUS.

If a surface in a direction opposite to the motion direction (press-sliding direction) of the main blade 22 is formed for example effectively perpendicular to or at an obtuse angle to the bottom surface, the mixture 10 can be collected around the main shaft 221 by rotating the main shaft 221 in the reverse direction.

If there are plural bottom parts 2111 on the bottom surface, the center parts of the main blade 22 are also disposed in positions of the bottom part corresponding to their number.

(f) Dispersing blade

The dispersion blade 23 is intended to disperse the mixture 10 which has been press-slid by the main blade 22. The dispersion blade 23 is disposed in a position at which the mixture 10 can be dispersed, and it rotates at a high speed such as 1000-4000 rpm. Due to this high speed rotation, the ion-conducting polymer 12 or its raw material coated on the particle surfaces of the powdered substance 11 uniformly disperses through the whole of the powdered substance. The mixture adheres on the area surrounding the main

shaft 221 of the main blade 22 when in firm mixing or low clay dispersion and tends to be ununiformed mixing. The dispersion blade 23 is positioned on the main shaft 221 of the main blade 22, rotating the same from the dry mixing stage to prevent the adhesion on the area surrounding the main shaft 221.

(g) Action of press-sliding mixer

A description of the operation using the press-sliding mixer of Fig. 7 and Fig. 8 will now be given. The press-sliding mixer is supported on a supporting platform 24, the container 21 being raised by a handle 241, and is controlled by a control panel 25.

First, the powdered substance 11 (containing an additive) is measured out, and introduced from a powdered substance input port 34. In an automated system, a measuring hopper or the like is installed above the powdered substance input port 34 for storage and measurement, and a valve 341 of the powdered substance input port is automatically opened by an input command. Simultaneously, to eliminate measurement errors from pressure rise in the container due to introduction of the powder, a discharge port 32 fitted with an aspiration filter 322 is opened alone so that only air is discharged.

Next, a valve 331 of an input port 33 for the ion-conducting polymer or its raw material is opened, and the polymer or its raw material is measured out manually or automatically and introduced into the container in the same way as the powdered substance. After introduction of the powdered substance and ion-conducting polymer or its raw material is complete, the input valves 331, 341 are closed. Further, if warm water at 30 °C is recirculated through a

jacket 213 of the container to promote wetting of the powdered substance and the ion-conducting polymer or its raw material, the wetting efficiency can be improved. However, when a penetration-assisting solvent is used, processing is performed at ordinary temperature.

Next, the main motor 222 is rotated at a low speed of about 10 rpm, the mixture 10 of the ion-conducting polymer or its raw material and the powdered substance is press-slid between the bottom surface of the container 21 and the main blade 22, and the ion-conducting polymer or its raw material gradually begins to penetrate the powdered substance. At this time, the press-slid mixture 10 rises up the container at the tip of the main blade 22, the mixture 10 falls down from above the center part of the container, and a turning over action takes place in the container over its entire circumference. This is repeated regularly so that the whole mixture is uniformly press-slid. After repeating the action for approximately 1 hour, the rotation speed of the main shaft 221 is automatically or manually increased to 60 rpm, and when wetting of the mixture 10 has reached effectively half of the surface area, a vacuum pump 353 of a degassing port 35 is operated, a degassing valve 351 is opened, and degassing is performed via a filter 352 for about 1 hour. In other words, the main blade 22 press-slides the mixture 10 while degassing is performed, so wetting and penetration dispersion of the ion-conducting polymer or its raw material in the powdered substance is promoted. Here, care should be taken when a low boiling-point solvent is added to the ion-conducting polymer or its raw material to promote dispersion in the powdered substance, as the concentration or viscosity of the ion-conducting polymer or its raw material increases and

dispersion becomes difficult if suction degassing is continuously performed by a high vacuum blower.

When penetration degassing has reached about 70% after degassing for approximately 1 hour, the dispersion blade is rotated at 2800 rpm to promote dispersion.

(h) Application to current-collecting member

The press-slid substance which has been made into a paste is thinly applied to the surface of the current-collecting member. After application, the solvent evaporates and dries to obtain the electrode structure. The device which applies the press-slid substance to the current-collecting member may be a doctor knife applicator.

The applied press-slid substance may be pressed against the current-collecting member to make it adhere to it more strongly. To achieve this, the bonding device 4 shown in Fig. 9 may for example be used. The press-slid substance can be made to adhere to the current-collecting member by gripping the electrode structure 1 comprising the current-collecting member coated with the press-slid substance between pressure rollers 41, applying a pressure to backup rollers 42 by a pressure device 43, and rotating the rollers.

Description of the Preferred Embodiments

Hereafter, an embodiment of a lithium ion secondary cell will be described.

(a) Example of manufacture of positive electrode structure (Example 1)

9.1 weight parts of LiCoO_2 of average particle size $5\ \mu\text{m}$ which is a powdered electrode active substance, and 0.6 weight parts of graphite powder of average particle size $4\ \mu\text{m}$ which is a powdered electrically-conducting substance, were introduced into a press-sliding mixer, and press-slid for 20 minutes. Next, 0.546 weight parts of an ion-conducting polymer raw material (A1) and 3.5 weight parts of acetonitrile were added. The ion-conducting polymer raw material (A1) was a mixture, and its composition and mixing ratio are shown in Table 1.

[Table 1]

Ion-conducting polymer raw material (A1)

Substance	Mixing ratio (weight parts)
Trifunctional (propylene glycol/ethylene glycol) random copolymer, SANNIX FA-103 (PO/EO=2/8, Mw=3,282, Sanyo Chemical Industries, Ltd.)	8.36
Trifunctional polyol, 1,4-butadiol	0.34
Ethylene cyanohydrin	1.27
Reaction catalyst NC-IM (Sankyo Air Products K.K.)	0.03
Total	10

The press-slid substance to which the ion-conducting polymer raw material (A1) was added, was press-slid in the press-sliding mixer for 5 hours. The press-slid substance was paste-like. 0.254 weight parts of polymeric MDI, MR-200 (NPU Co.) was added to the press-slid substance, and the mixture stirred for 5 minutes in the press-sliding mixer. The press-slid substance was removed, transferred to aluminum foil of thickness $20\ \mu\text{m}$, and spread by a doctor knife applicator of $100\ \mu\text{m}$ gap. The resulting product was left at room

temperature for 15 minutes, and then heated at 80°C for 1 hour. The thickness of the positive electrode structure obtained was 80 μ m. The same effectiveness is seen when spreading by a doctor knife applicator of 200 μ m gap.

(b) Example of manufacture of positive electrode structure (Example 2)

9.0 weight parts of LiCoO_2 of average particle size 5 μ m which is a powdered electrode active substance, and 0.6 weight parts of ketjenblack and 0.2 weight parts of graphite powder of average particle size 4 μ m which are powdered electrically-conducting substances, were introduced into a press-sliding mixer (capacity 300cc), and press-slid for 20 minutes. Next, 1.172 weight parts of an ion-conducting polymer raw material (A1) and 3.5 weight parts of acetonitrile were added. These mixtures were press-slid for 5 hours in the press-sliding mixer. The press-slid substance was paste-like. 0.548 weight parts of polymeric MDI, MR-200 (NPU Co.), was added to the press-slid substance, and the mixture press-slid for 5 minutes. The press-slid substance was removed, transferred to aluminum foil of thickness 20 μ m, and spread by a doctor knife applicator of 100 μ m gap. The resulting product was left at room temperature for 15 minutes, and heated at 80°C for 1 hour. The thickness of the electrode obtained was 80 μ m. The same effectiveness is seen by the use of 10.0 weight parts of acetonitrile and spreading a doctor knife applicator of 250 μ m gap.

(c) Example of manufacture of positive electrode structure (Example 3)

9.1 weight parts of LiCoO_2 of average particle size $5\ \mu\text{m}$ which is a powdered electrode active substance, 0.341 weight parts of an ion-conducting polymer raw material (A1) and 3.0 weight parts of acetonitrile were introduced into a press-sliding mixer (capacity 300cc), and the mixture press-slid for 7 hours. The press-slid substance was paste-like. Next, 0.159 weight parts of polymeric MDI, MR-200 (NPU Co.) was added, and the mixture press-slid for 5 minutes. The press-slid substance was removed, transferred to aluminum foil of thickness $20\ \mu\text{m}$, and spread by a doctor knife applicator of $100\ \mu\text{m}$ gap. The resulting product was left at room temperature for 15 minutes, and heated at 80°C for 1 hour. The thickness of the electrode obtained was $80\ \mu\text{m}$. The same effectiveness is seen when spreading by a doctor knife applicator of $200\ \mu\text{m}$ gap.

(d) Example of manufacture of positive electrode structure (Example 4)

9.1 weight parts of LiCoO_2 of average particle size $5\ \mu\text{m}$ which is a powdered electrode active substance, and 0.6 weight parts of graphite powder of average particle size $4\ \mu\text{m}$ which is a powdered electrically-conducting substance, were introduced into a press-sliding mixer device (capacity 300cc), and press-slid for 20 minutes. Next, 2.0 weight parts of an ion-conducting polymer raw material (A2) and 3.0 weight parts of acetonitrile were added. The ion-conducting polymer raw material (A2) was a mixture, and its composition and mixing ratio are shown in Table 2. In the Table 2, the same result may be obtained by the use of polyethyleneglycoldimethacrylate (536

molecular weight) instead of trimethylolpropanetrimethacrylate.

[Table 2]

Ion-conducting polymer raw material (A2)

Substance	Mixing ratio (weight parts)
Cyanoethylated/dihydroxypropylated polyvinyl alcohol	0.625
Methoxypolyethyleneglycol methacrylate (mol. wt. 468)	3.125
Trimethylolpropanetri methacrylate	6.25
Total	10

The press-slid substance to which the ion-conducting polymer raw material (A2) was added, was press-slid in the press-sliding mixer (capacity 300cc) for 5 hours. The press-slid substance was paste-like. A solution of 0.01 weight parts of 2,2'-azobis (2,4-dimethylvaleronitrile) and 0.5 weight parts of a (1/1) vol liquid electrolyte of ethylene carbonate (EC)/diethylene carbonate (DEC) was added to the press-slid substance, and the mixture further press-slid for 5 minutes. The press-slid substance was removed, transferred to aluminum foil of thickness 20 μ m, and spread by a doctor knife applicator of 100 μ m gap. The resulting product was left at room temperature for 15 minutes, and heated at 80 $^{\circ}$ C for 3 hours. The thickness of the electrode obtained was 80 μ m. The same effectiveness may be expected by the use of 0.5 weight parts of the ion-conducting polymer raw material (A2), 0.003 weight parts of 2,2'-azobis (2,4-dimethylvaleronitrile), and by spreading a doctor knife applicator of 200 μ m gap.

(e) Example of manufacture of negative electrode structure (Example 5)

9.1 weight parts of graphite powder of average particle size $5\ \mu\text{m}$ which is a powdered electrode active substance, 0.341 weight parts of an ion-conducting polymer raw material (A1) and 3.0 weight parts of acetonitrile were introduced into a press-sliding mixer (capacity 300cc), and the mixture press-slid for 7 hours. The press-slid substance was paste-like. Next, 0.159 weight parts of polymeric MDI, MR-200 (NPU Co.) was added, and the mixture press-slid for 5 minutes. The press-slid substance was removed, transferred to copper foil of thickness $20\ \mu\text{m}$, and spread by a doctor knife applicator of $100\ \mu\text{m}$ gap. The resulting product was left at room temperature for 15 minutes, and heated at 80°C for 1 hour. The thickness of the electrode obtained was $80\ \mu\text{m}$. The same effectiveness may be expected by the use of 10.0 weight parts of the acetonitrile and spreading a doctor knife applicator of $250\ \mu\text{m}$ gap.

(f) Example of manufacture of positive electrode structure (Example 6)

9.1 weight parts of graphite powder of average particle size $5\ \mu\text{m}$ which is a powdered electrode active substance, 0.2 weight parts of an ion-conducting polymer raw material (A2) and 3.0 weight parts of acetonitrile were introduced into a press-sliding mixer (capacity 300cc), and press-slid for 5 hours. The press-slid substance was paste-like. A solution of 0.01 weight parts of 2,2'-azobis (2,4-dimethylvaleronitrile) and 0.5 weight parts of a liquid electrolyte of ethylene carbonate (EC)/diethylene carbonate (DEC) in a volume ratio of 1:1 was added to the press-slid substance, and the mixture further press-slid for 5 minutes. The press-slid substance was removed, transferred to copper foil of

thickness 20 μ m, and spread by a doctor knife applicator of 100 μ m gap. The resulting product was left at room temperature for 15 minutes, and heated at 80°C for 3 hours. The thickness of the electrode obtained was 80 μ m. The same effectiveness may be expected by the use of 0.8 weight parts of the ion-conducting polymer raw material (A2), 10.0 weight parts of acetonitrile, 0.004 weight parts of 2,2'-azobis (2,4-dimethylvaleronitrile), and by spreading a doctor knife applicator of 250 μ m gap.

(g) Analysis of electrode structure

Fig. 10 shows 5000 times magnified electron micrograph of LiCoO₂ of average particle size 5 μ m which had not received any processing. In Fig. 10, the corners of the compound particles of LiCoO₂ are square and clearly visible. The electron micrograph of Fig. 11 is an electron micrograph of the positive electrode structure obtained in Example 3. In Fig. 11, the corners of the compound particles of LiCoO₂ are smooth, and appear to be covered by a film. Hence, comparing with the LiCoO₂ in Fig. 10, it is evident that the LiCoO₂ particles in Fig. 11 are uniformly covered with a film of ion-conducting polymer.

Fig. 12 shows 5000 times magnified a two-dimensional electronic image of the surface of the positive electrode structure obtained in Example 3 measured by a Shimadzu EPMA-8705 Electron Probe Micro-Analyzer. The particles of Fig. 12 have smooth corners and appear to be covered by a coating.

(h) Comparative example of positive electrode structure (Comparative Example 1)

11.5 weight parts of n-methylpyrrolidine containing, in solution, 0.5 weight parts of polyvinylidene fluoride (PVDF) which has no ion-conducting property as a polymer binder, was mixed with 9.0 weight parts of LiCoO_2 of average particle size $5\ \mu\text{m}$ which is a powdered electrode active substance, and 0.8 weight parts of ketjenblack and 0.2 weight parts of graphite powder of average particle size $4\ \mu\text{m}$ which are powdered electrically-conducting substances, in an ordinary blade mixer. After mixing for 8 hours, the mixture was removed, transferred to copper foil of thickness $20\ \mu\text{m}$, and spread by a doctor knife applicator of $100\ \mu\text{m}$ gap. The resulting product was then heated to evaporate n-methylpyrrolidine. The thickness of the electrode obtained was $80\ \mu\text{m}$. The same result is expected by the use of 5.0 weight parts of n-methylpyrrolidine and spreading a doctor knife applicator of $200\ \mu\text{m}$ gap.

(i) Comparative example of positive electrode structure (Comparative Example 2)

25.5 weight parts of n-methylpyrrolidine containing, in solution, 0.5 weight parts of polyvinylidene fluoride (PVDF) which has no ion-conducting property as a polymer binder, was mixed with 9.5 weight parts of graphite powder of average particle size $4\ \mu\text{m}$ which is a powdered electrically-conducting substance, in an ordinary blade mixer. After mixing for 8 hours, the mixture was removed, transferred to copper foil of thickness $20\ \mu\text{m}$, and spread by a doctor knife applicator of $100\ \mu\text{m}$ gap. The resulting product was then heated to evaporate n-methylpyrrolidine. The thickness of the electrode obtained was $80\ \mu\text{m}$. The same result is expected by the use of

10.0 weight parts of n-methylpyrrolidine containing, in solution, 1.0 weight parts of polyvinylidene fluoride (PVDF) and spreading a doctor knife applicator of 250 μ m gap.

(j) Charging/discharging tests

A test lithium ion secondary cell was manufactured using the positive electrode structures manufactured in the examples and comparative examples. The positive electrode and negative electrode were both cut out to have an electrode surface area of 4cm². Completely solid polymer (all polymer), polymer gel electrolyte (polymer gel), liquid electrolyte (liquid) and a separator were sandwiched between the positive electrode and negative electrode to manufacture the test cell. The concentration of lithium salt (supporting electrolyte salt) in the respective electrolytes was arranged to be 1M. This cell was charged at 0.3mA per 1cm² of electrolyte surface area to 4.1V, and after allowing to stand for 15 minutes, it was discharged at 0.3mA/cm² to 2.7V. Combinations for which two of these charging/discharging cycles were successfully performed, were considered to be combinations for which charging/discharging is possible, and are shown in Table 3. Table 4 shows the contents of the electrolytes listed in Table 3. The same effectiveness is expected if the thickness of the electrolyte is 20 μ m at P1-AP4 and 30 μ m at PG1-PG2.

[Table 3]

Charging/discharging test results

No	Positive electrode	Negative electrode	Electrolyte	Charging/discharging test result
1	Example 1	Example 5	AP1	Possible
2	Example 1	Example 5	AP2	Possible
3	Example 1	Example 5	AP3	Possible
4	Example 1	Example 5	AP4	Possible
5	Example 1	Example 5	PG1	Possible
6	Example 1	Example 5	PG2	Possible
7	Example 1	Example 5	L1	Possible
8	Example 2	Example 5	AP3	Possible
9	Example 2	Example 6	PG2	Possible
10	Example 4	Example 5	AP3	Possible
11	Example 4	Example 6	PG2	Possible
12	Comparative example 1	Comparative example 2	AP1	Charging/discharging impossible
13	Comparative example 1	Comparative example 2	AP2	Charging/discharging impossible
14	Comparative example 1	Comparative example 2	AP3	Charging/discharging impossible
15	Comparative example 1	Comparative example 2	AP4	Charging/discharging impossible
16	Comparative example 1	Comparative example 2	PG1	Charging/discharging impossible
17	Comparative example 1	Comparative example 2	PG2	Charging/discharging impossible
18	Comparative example 1	Comparative example 2	L1	Possible

[Table 4]

Electrolyte used in test

Symbol	Type	Composition	Thickness
AP1	All polymer	Cyanoethylated/dihydroxypropylated cellulose (e.g. Japanese Patent Application Laid-Open No. 8-225626)	100 μ m
AP2	All polymer	Cyanoethylated/dihydroxypropylated cellulose and methacryl polymer 3D cross-linked structure (e.g. Japanese Patent Application Laid-Open No. 8-225626)	100 μ m
AP3	All polymer	High viscosity polyurethane electrolyte (e.g. Japanese Patent Application No. 11-78085)	100 μ m
AP4	All polymer	Cyanoethylated/dihydroxypropylated polyvinyl alcohol (e.g. Japanese Patent Application No. 11-78086)	100 μ m
PG1	Polymer gel	Cyanoethylated/dihydroxypropylated polyvinyl alcohol and methacryl polymer 3D cross-linked structure containing 50% ethylene carbonate (EC)/diethylene carbonate (DEC) = (1/1) vol liquid electrolyte (e.g. Japanese Patent Application No. 11-78087)	100 μ m
PG2	Polymer gel	High viscosity polyurethane electrolyte containing 50% ethylene carbonate (EC)/diethylene carbonate (DEC) = (1/1) vol liquid electrolyte (e.g. Japanese Patent Application No. 11-78085)	100 μ m
L1	Liquid	Impregnation of ethylene carbonate (EC)/diethylene carbonate (DEC) = (1/1) vol solution in polyethylene separator	23 μ m

In the charging/discharging tests of the examples and comparative examples, test cells using the positive electrode and negative electrode of this invention could be successfully charged and discharged. However, test cells using the electrodes of the comparative examples and a solid or gel electrolyte could not be charged/discharged, although test cells using liquid electrolytes could be charged/discharged.

An embodiment of the electric double layer capacitor is explained next.
Embodiment of electrode structure of capacitor

An electrode structure for capacitor is manufactured by adding the carbon black as the powdered conducting substance in a phenol activated carbon (manufactured by Kansai Kagaku Corporation) as the powdered electrode substance; dry-mixing with a mixing container; adding the polymer A1 as the binder to be mixed; adding NMP (N methylpyrrolidone) as the solvent to be mixed; applying on the current-collecting member by the doctor knife applicator; and drying. The thickness of the electrode is 75 μ .

Industrial Field of Application

This invention makes it possible to obtain an electrode having a satisfactory electromotive effect with ions.

This invention makes it possible to obtain an electrode which is very safe.

This invention further makes it possible to obtain a secondary cell which

is very safe.

This invention further makes it possible to obtain an extremely safe electric double layer capacitor.

This invention further makes it possible to obtain a secondary cell or capacitor which does not use an electrolyte.

This invention further makes it possible to obtain an electric double layer capacitor which does not require an electrolyte.

WHAT IS CLAIMED IS:

1. An electrode structure for electrical components in which ions migrate between electrodes, wherein a powdered electrode active substance or a powdered large surface material coated by an ion-conducting polymer, is made to adhere to a current-collecting member.

2. An electrode structure as defined in Claim 1, wherein a powdered electrically-conducting substance or a powdered large surface material is mixed with the powdered electrode active substance coated by the ion- conducting polymer and made to adhere to the current-collecting member.

3. A secondary cell comprising:

a positive electrode structure and a negative electrode structure comprising a current-collecting member to which a powdered electrode active substance coated by an ion-conducting polymer is made to adhere, and

an ion-conducting substance disposed between the positive electrode structure and the negative electrode structure.

4. A secondary cell as defined in Claim 3, wherein:

the ion-conducting substance is an ion-conducting polymer.

5. A secondary cell as defined in Claim 3, wherein:

the ion-conducting substance is an electrolyte, and a separator is

disposed in this electrolyte.

6. A method of manufacturing an electrode structure for electrical components in which ions migrate between electrodes, wherein the electrode structure is formed by press-sliding a mixture of at least an ion-conducting polymer or ion-conducting polymer raw material with a powdered electrode active substance or a powdered large surface material so as to coat the powdered electrode active substance with the ion-conducting polymer, and applying the product to a current-collecting member.

7. A method of manufacturing an electrode structure as defined in Claim 6, wherein:

the electrode structure is manufactured by press-sliding a mixture and a solvent to make a paste.

8. A method of manufacturing a secondary cell wherein ions migrate between electrodes, wherein:

an ion-conducting substance is disposed between a positive electrode structure and a negative electrode structure formed by press-sliding at least a mixture of an ion-conducting polymer and a powdered electrode active substance so as to coat the powdered electrode active substance with the ion-conducting polymer, and applying the product to a current-collecting member.

9. A method of manufacturing a secondary cell as defined in Claim 8, wherein:
the ion-conducting substance is an ion-conducting polymer.

10. A method of manufacturing a secondary cell as defined in Claim 8, wherein:
the ion-conducting substance is an electrolyte, and a separator is
disposed in this electrolyte.

11. An electric double layer capacitor comprising an electrode structure where a
powdered large surface material coated by an ion-conducting polymer is made
to adhere to a current-collecting member and an ion-conducting substance
disposed between electrodes.

12. An electric double layer capacitor as defined in Claim 11, wherein:
said ion-conducting substance is an electrolyte, and a separator is
positioned in said electrolyte.

13. An electric double layer capacitor as defined in claim 11, wherein:
said ion-conducting substance is an ion-conducting polymer.

ABSTRACT

An electrode structure 1 comprising a powdered active electrode substance 11 coated by an ion-conducting polymer 12 which is made to adhere to a current-collecting member 13, a secondary cell employing this structure and a method of manufacturing this structure are proposed to provide an electrode, secondary cell, or electric double layer capacitor with a high degree of safety, or a secondary cell or electric double layer capacitor which does not use an electrolyte.

Fig. 1

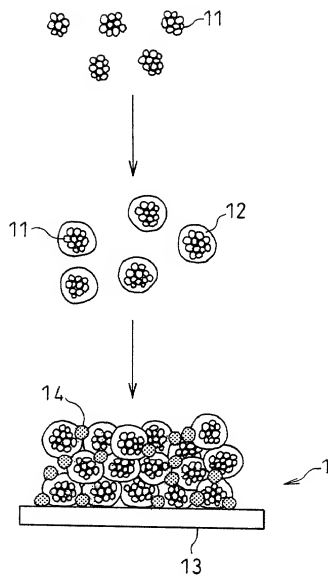


Fig. 2

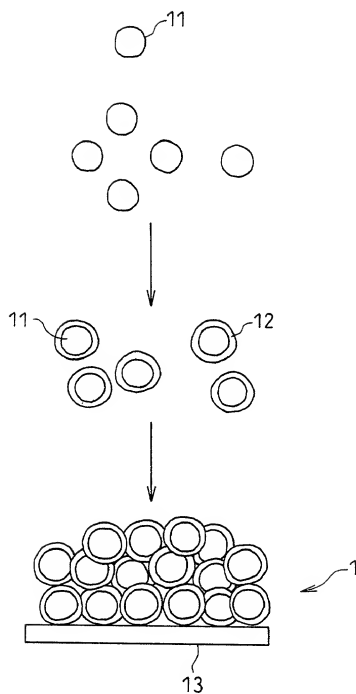


Fig. 3




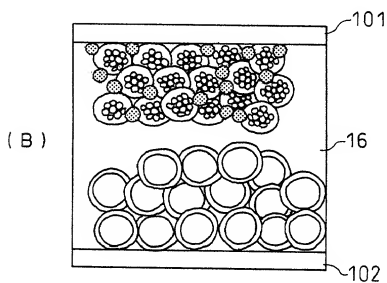


Fig. 4


(A)

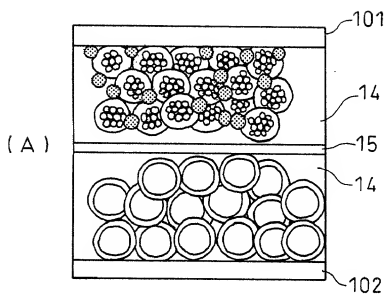

(B)



(C)



(D)





Fig. 5

(A)

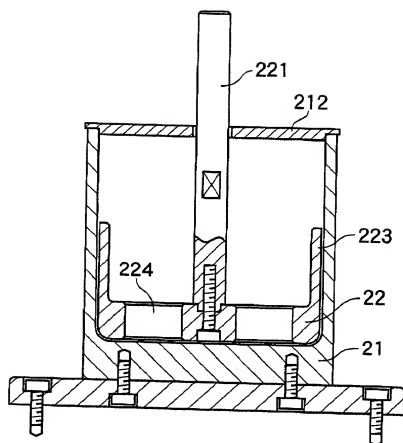

(B)






Fig. 6

(A)

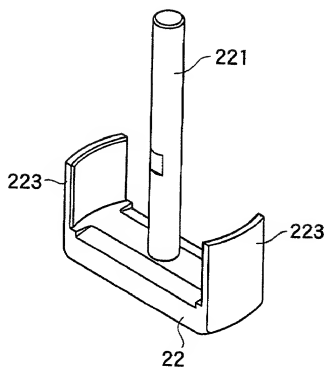

(B)

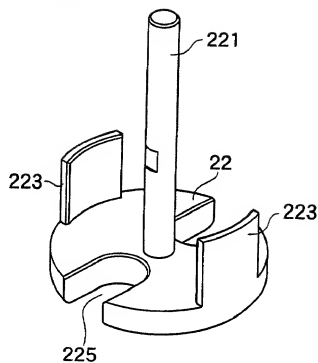

(C)




Fig. 7

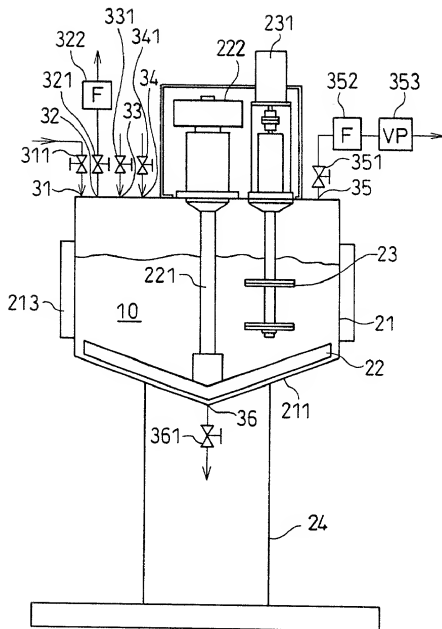


Fig. 8

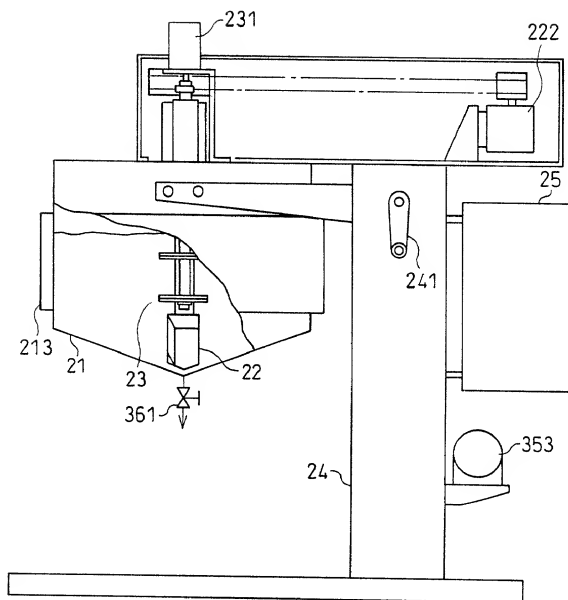


Fig. 9


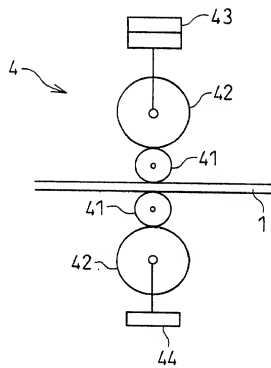


FIG. 10



FIG. 11

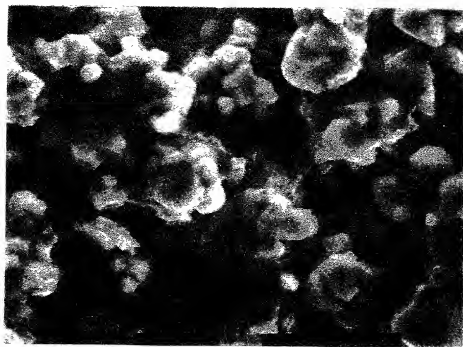

000000-11220000

FIG. 12

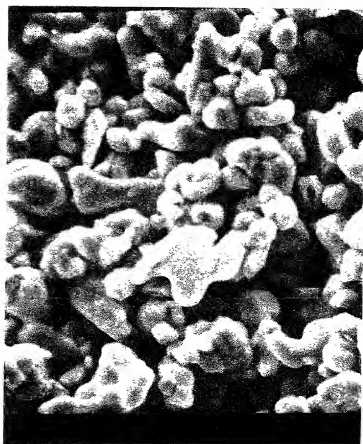


Fig. 13

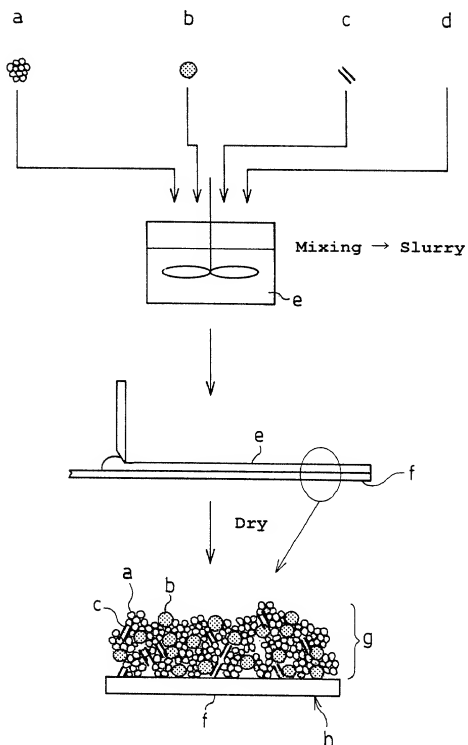


Fig. 14





Fig. 15





Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、以下に記名された発明者として、ここに下記の通り宣言する：

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先そして国籍は、私の氏名の後に記載された通りである。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明について、特許請求範囲に記載され、且つ特許が求められている発明主題に関して、私は、最初、最先且つ唯一の発明者である（唯一の氏名が記載されている場合）か、或いは最初、最先且つ共同発明者である（複数の氏名が記載されている場合）と信じている。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

ELECTRODE STRUCTURE, ELECTRIC COMPONENTS, AND MANUFACTURING METHOD

上記発明の明細書はここに添付されているが、下記の欄がチェックされている場合は、この限りでない：

the specification of which is attached hereto unless the following box is checked:

- ☐ _____ の日に出版され、
この出版の米国出願番号またはPCT国際出願番号は、
_____ であり、且つ
_____ の日に補正された出版（該当する場合）

☒ was filed on Apr. 11, 2001
as United States Application Number or
PCT International Application Number
09/807,214 and was amended on
_____ (if applicable)

私は、上記の補正書によって補正された、特許請求範囲を含む上記明細書を検討し、且つ内容を理解していることをここに表明する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法第37編規則1.56に定義されている、特許性について重要な情報を開示する義務があることを認める。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56

Japanese Language Declaration (日本語宣言書)

私は、ここに、以下に記載された外国の特許出願または発明者証の出願、或いは米国以外の少なくとも一國を指定している米国法典第35編第365条(a)によるPCT国際出願について、同第119条(a)-(d)項又は第365条(b)項に基づいて優先権を主張するとともに、優先権を主張する本出願の出願日より前の出願日を有する外国での特許出願または発明者証の出願、或いはPCT国際出願については、いかなる出願も、下記の枠内をチェックすることにより示した。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application for which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

外国での先行出願

優先権主張なし

11-262502

Japan

12/08/99

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願日/月/年)

☐

(Number)
(番号)

(Country)
(国名)

(Day/Month/Year Filed)
(出願日/月/年)

☐

私は、ここに、下記のいかなる米国低特許出願についても、その米国法典第35編119条(a)項の利益を主張する。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、ここに、下記のいかなる米国出願についても、その米国法典第35編第120条に基づく利益を主張し、又米国を指定するいかなるPCT国際出願についても、その同第365条(c)に基づく利益を主張する。また、本出願の各特許請求の範囲の主題が、米国法典第35編第112条第1段に規定された状態で、先行する米国出願又はPCT国際出願に開示されていない場合においては、その先行出願の出願日と本国内出願日またはPCT国際出願日との間の期間中に入手された情報で、連邦規則法典第37編規則1.56に定義された特許性に関わる重要な情報について開示義務があることを承認する。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可、係属中、放棄)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可、係属中、放棄)

私は、ここに表明された私自身の知識に依る陳述が真実であり、且つ情報と信ずることに基づく陳述が、真実であると信じられることを宣言し、さらに、故意に虚偽の陳述などを行った場合は、米国法典第18編第1001条に基づき、罰金または拘禁、若しくはその両方により処罰され、またそのよな故意による虚偽の陳述は、本出願またはそれに対して発行されるいかなる特許も、その有効性に問題が生ずることを理解した上で陳述が行われたことを、ここに宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Japanese Language Declaration (日本語宣言書)

委任状: 私は本出願を審査する手続を行い、且つ米国特許商標庁との全ての業務を遂行するために、記名された発明者として、下記の弁護士及び/または弁理士を任命する。(氏名及び登録番号を記載すること)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

書類送付先

Send Correspondence to:
Liniak, Berenato, Longacre &
White
6550 Rock Spring Drive, Ste 240
Bethesda, Maryland 20817

直通電話連絡先: (氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Matthew Johnston (301)896-0600

第一または第一発明者氏名

Full name of sole or first inventor

Takaya SATO

発明者の署名

日付

Inventor's signature

Date

Takaya Gato

July 24, 2001

住所

Residence

c/o NISSHINBO INDUSTRIES, INC. Research and Development Center,
2-3, Ohnodai 1-chome, Midori-ku, Chiba-shi, Chiba 267-0056 Japan

国籍

Citizenship

Japan JPX

郵便の宛先

Post Office Address

c/o NISSHINBO INDUSTRIES, INC. Research and Development Center,
2-3, Ohnodai 1-chome, Midori-ku, Chiba-shi, Chiba 267-0056 Japan

第二共同発明者がいる場合、その氏名

Full name of second joint inventor, if any

Tatsuo SHIMIZU

第二共同発明者の署名

日付

Second inventor's signature

Date

Tatsuo Shimizu

July 24, 2001

住所

Residence

c/o CI TECHNO-SALES INC., 4-13, Kiou-cho, Chiyoda-ku,
Tokyo 102-0094 Japan JPX

国籍

Citizenship

Japan

郵便の宛先


Post Office Address

c/o CI TECHNO-SALES INC., 4-13, Kiou-cho, Chiyoda-ku,
Tokyo 102-0094 Japan

(第三以下の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

United States Patent & Trademark Office
Office of Initial Patent Examination — Scanning Division



Application deficiencies found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☒ Scanned copy is best available. *Drawings*